

Pan burn behaviour with different fuels & an approach to modelling

Shiva Kumar. A and Bhaskar Dixit. C.S

Collaborators: Sowriraajan. A. Ve and Mukunda. H. S



Fire & Combustion research Centre
Jain University, Jakkasandra, Bangalore-562112


Outline

1. Introduction
2. Pans used and experimental design
3. Comparison with results of Chen and Kang (validation check)
4. Fuel depth effects – with different materials
5. Is wall conduction responsible for higher burn rates?
6. What is happening in the liquid phase?
7. Wall temperature behaviour?
8. Other fuels – kerosene, diesel and alcohol
9. Comparison of burn rates
10. Key points from experiments
11. The non-dimensional number – basis
12. The correlation and the results for all the fuels
13. Conclusions

Introduction



- Pool fire has been a subject of study for six decades from the time Hottel [1] published a review of the Russian work. Considerable information and understanding has been gained over this period with research, fire safety technology and evolution of standards for acceptance of fire safety products having made great progress.
- One of the key aspects of importance is the prediction of burn rates from liquid pool fires, particularly because pool fires are a part of the standards for fire extinguishment. While unsteady burn process is the basis of these tests, *most investigators have used steady arrangement to study the burn rate of liquid pool fires, both experimentally and for model development.*
- In view of this, in the present study, unsteady pool fire experiments has been conducted on n-heptane, ethanol, methanol, kerosene and diesel by allowing the fuel thickness (h_{fu}) to vary with time for h_{fu} of 10 to 20 mm in 200 mm dia pans.
- Data on mass loss, wall temperatures and fuel temperatures at several locations have been obtained for 200 mm diameter pans of 40 mm depth with different materials - *Glass (GL), Stainless steel (SS), Mild steel (MS) and Aluminum alloy (AL)* with a wide range of thermal conductivities.
- Many intriguing aspects of the burn behavior have been explored through analysis of data with the aim to help the unsteady modeling using scaling laws.

Pans used for experiments

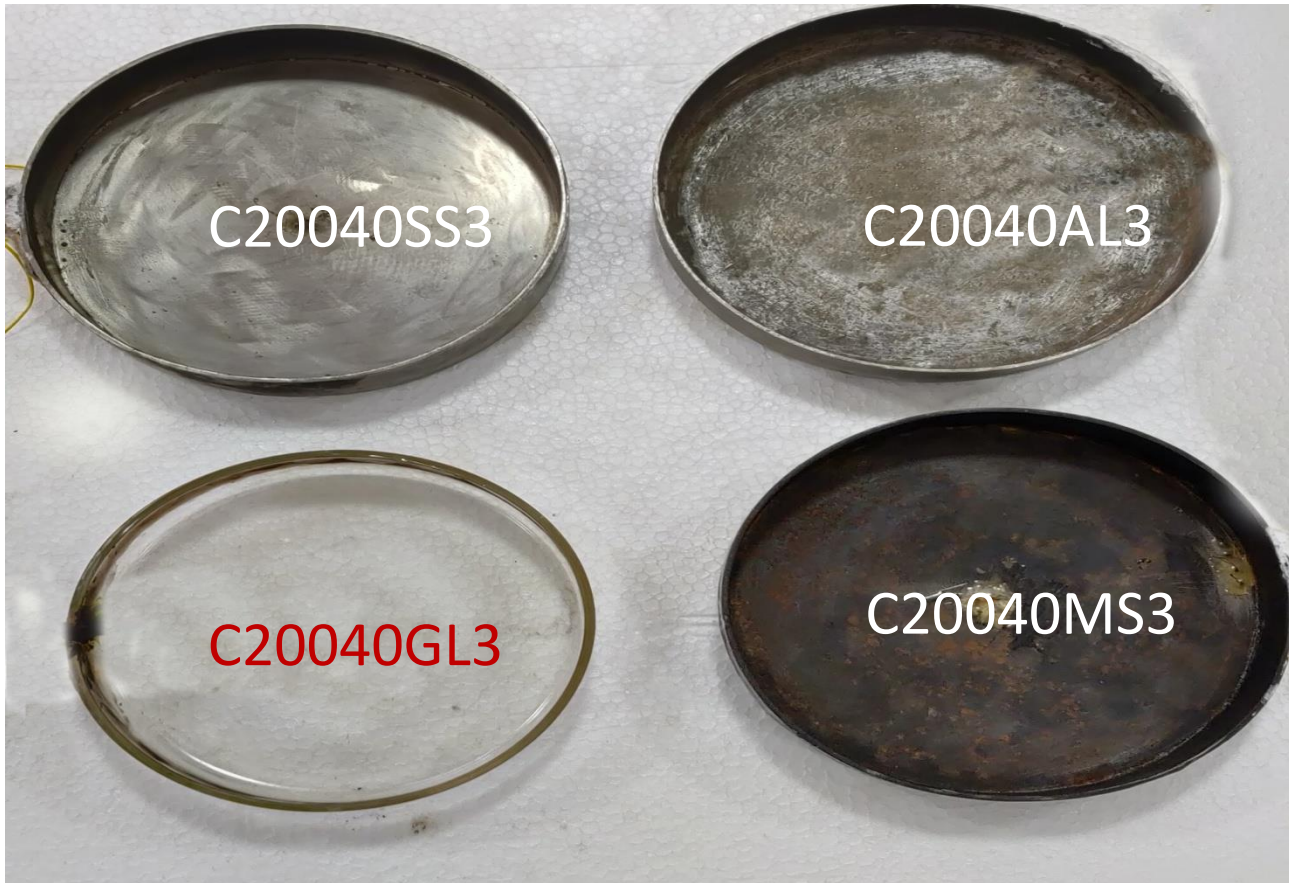

Pans of 200 mm dia, 40 mm depth made of Stainless Steel (SS), Mild steel (MS), Aluminum alloy (Al) and glass (GL) (clockwise from the top) on left side and pans of 300, 400 and 500 mm diameter, 40, 50 and 60 mm depth made of MS on the right side


The burn process and measurements in Pool fires

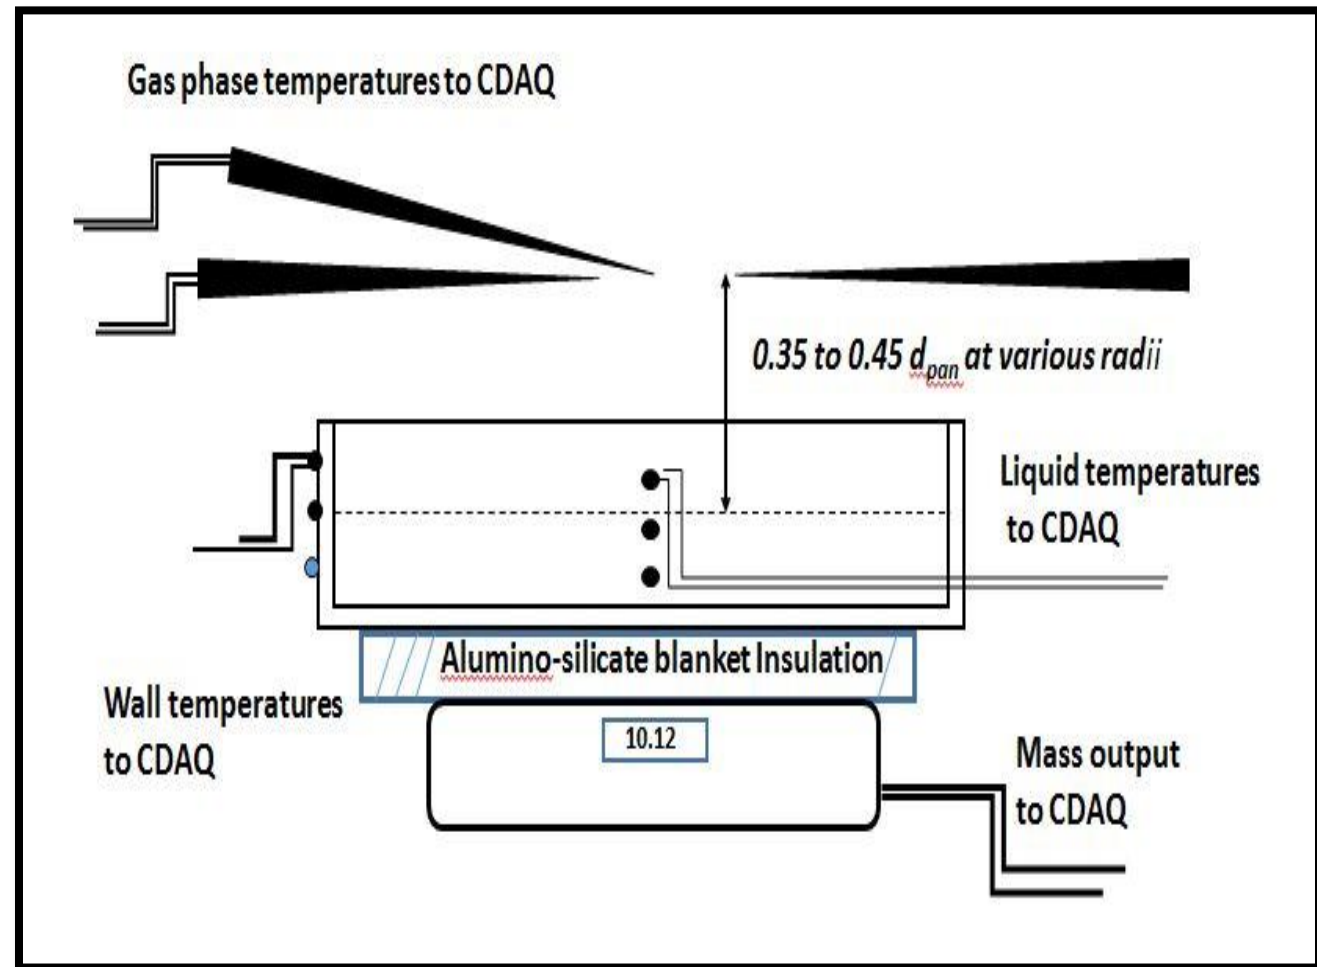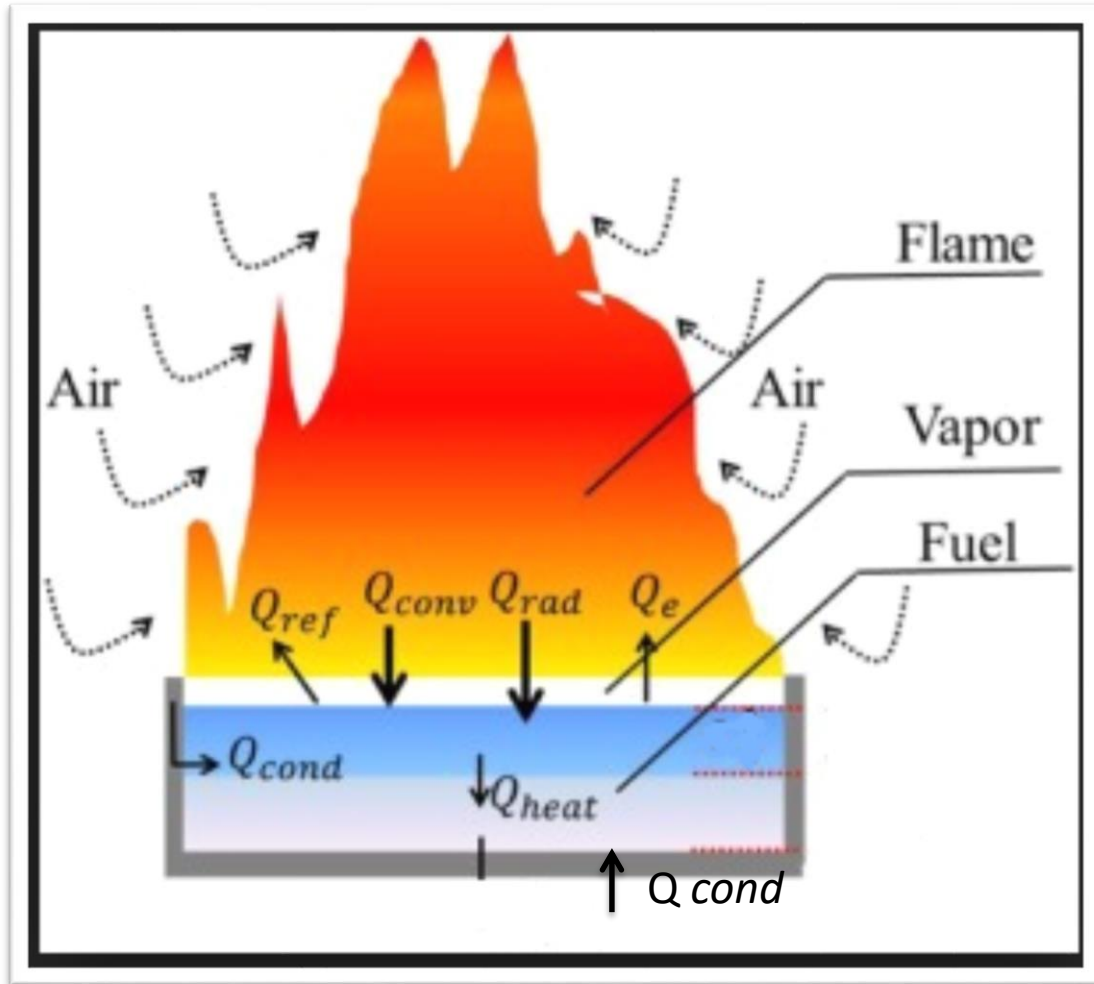

$$\rho_l \dot{r} = \frac{(\ddot{Q}_{cond} + \ddot{Q}_{conv} + \ddot{Q}_{Rad})}{(L + Cp(T_s - T_0))}$$



Flame picks up in a few seconds, Convective and Radiative fluxes also become effective at this time. Conduction along the walls takes time

Comparison of Chen, Kang et al 200 mm pan data

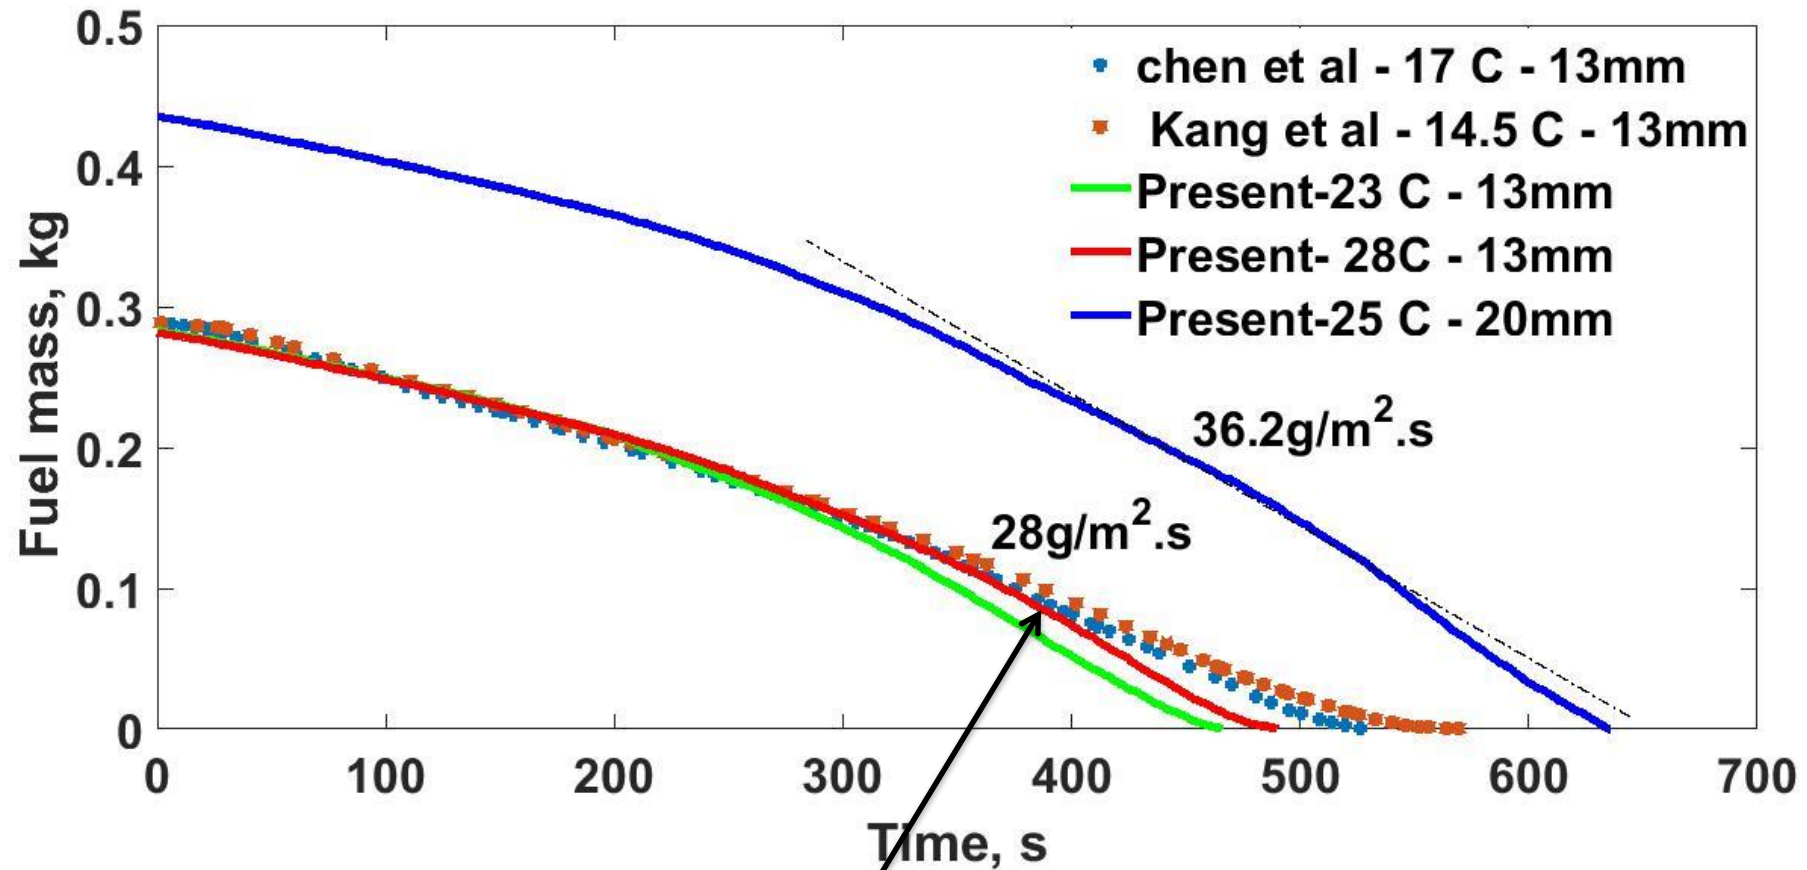


The comparison is considered “good”. The higher slopes are due to enhanced initial temperature at FCRC.

Fuel depth Effect (MS, 200 mm pan) on the mean and Peak Flux for n-heptane

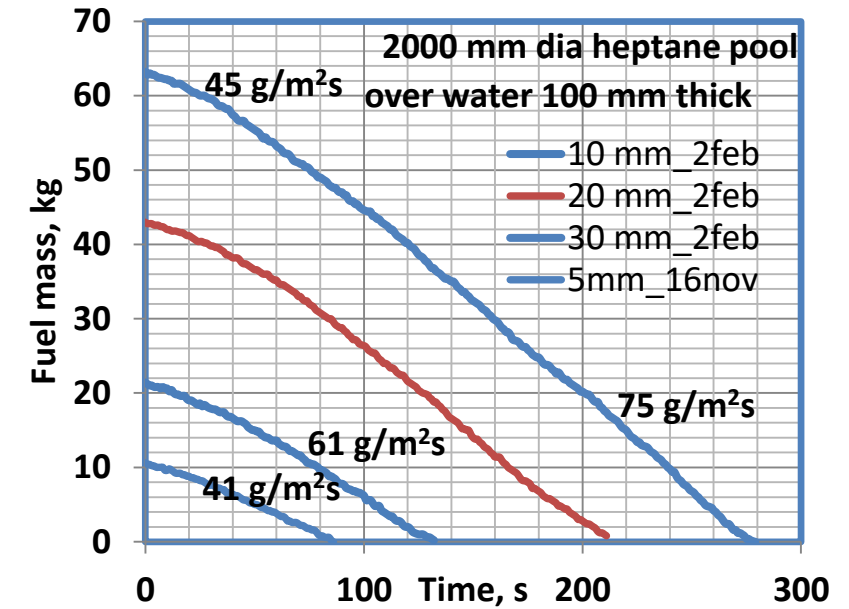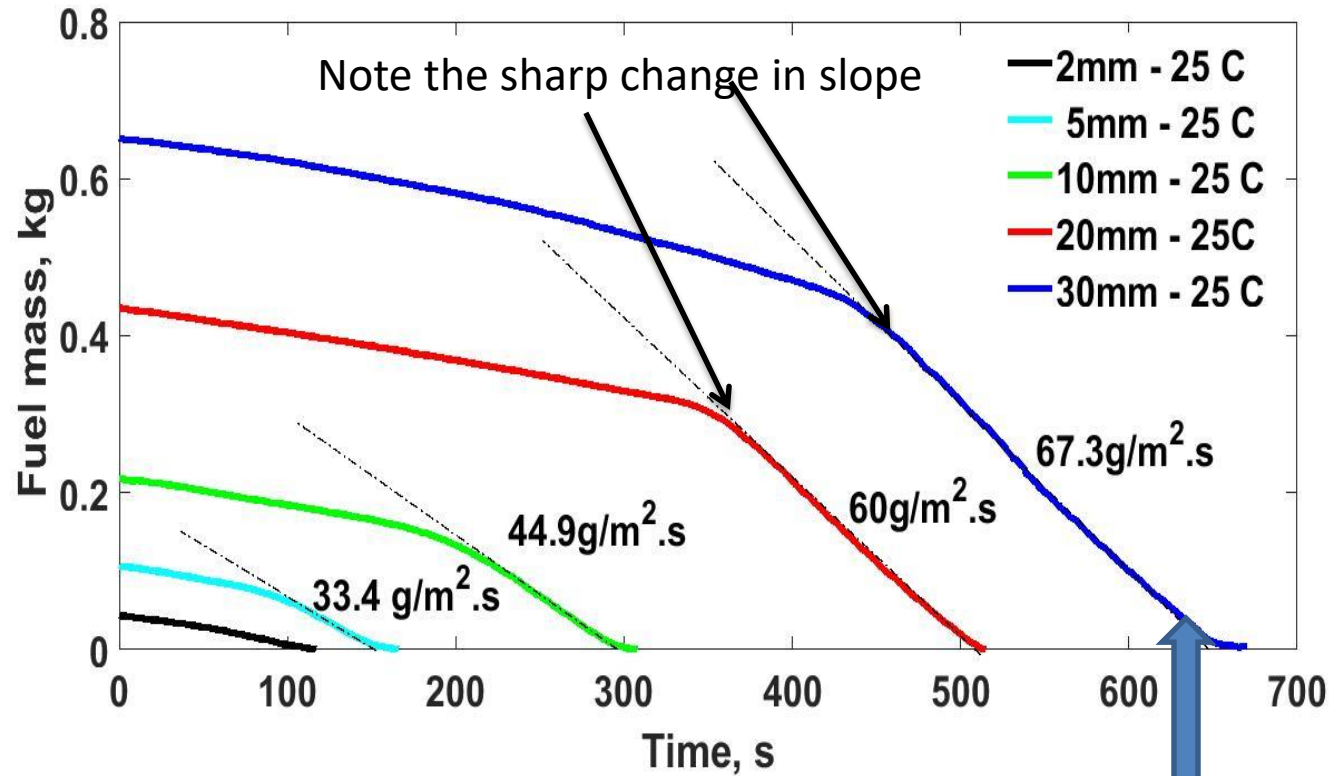

- At this small pan diameter, the peak flux is 67 g/m².s at fuel depth > 20 mm, a flux found only in large pans because of significant radiation flux .
- A quick inference is that this behavior is related to the liquid in the pool having reached boiling, a feature that needs further investigation.
- At this stage, it is thought useful to examine the burn behavior with pans of different materials.


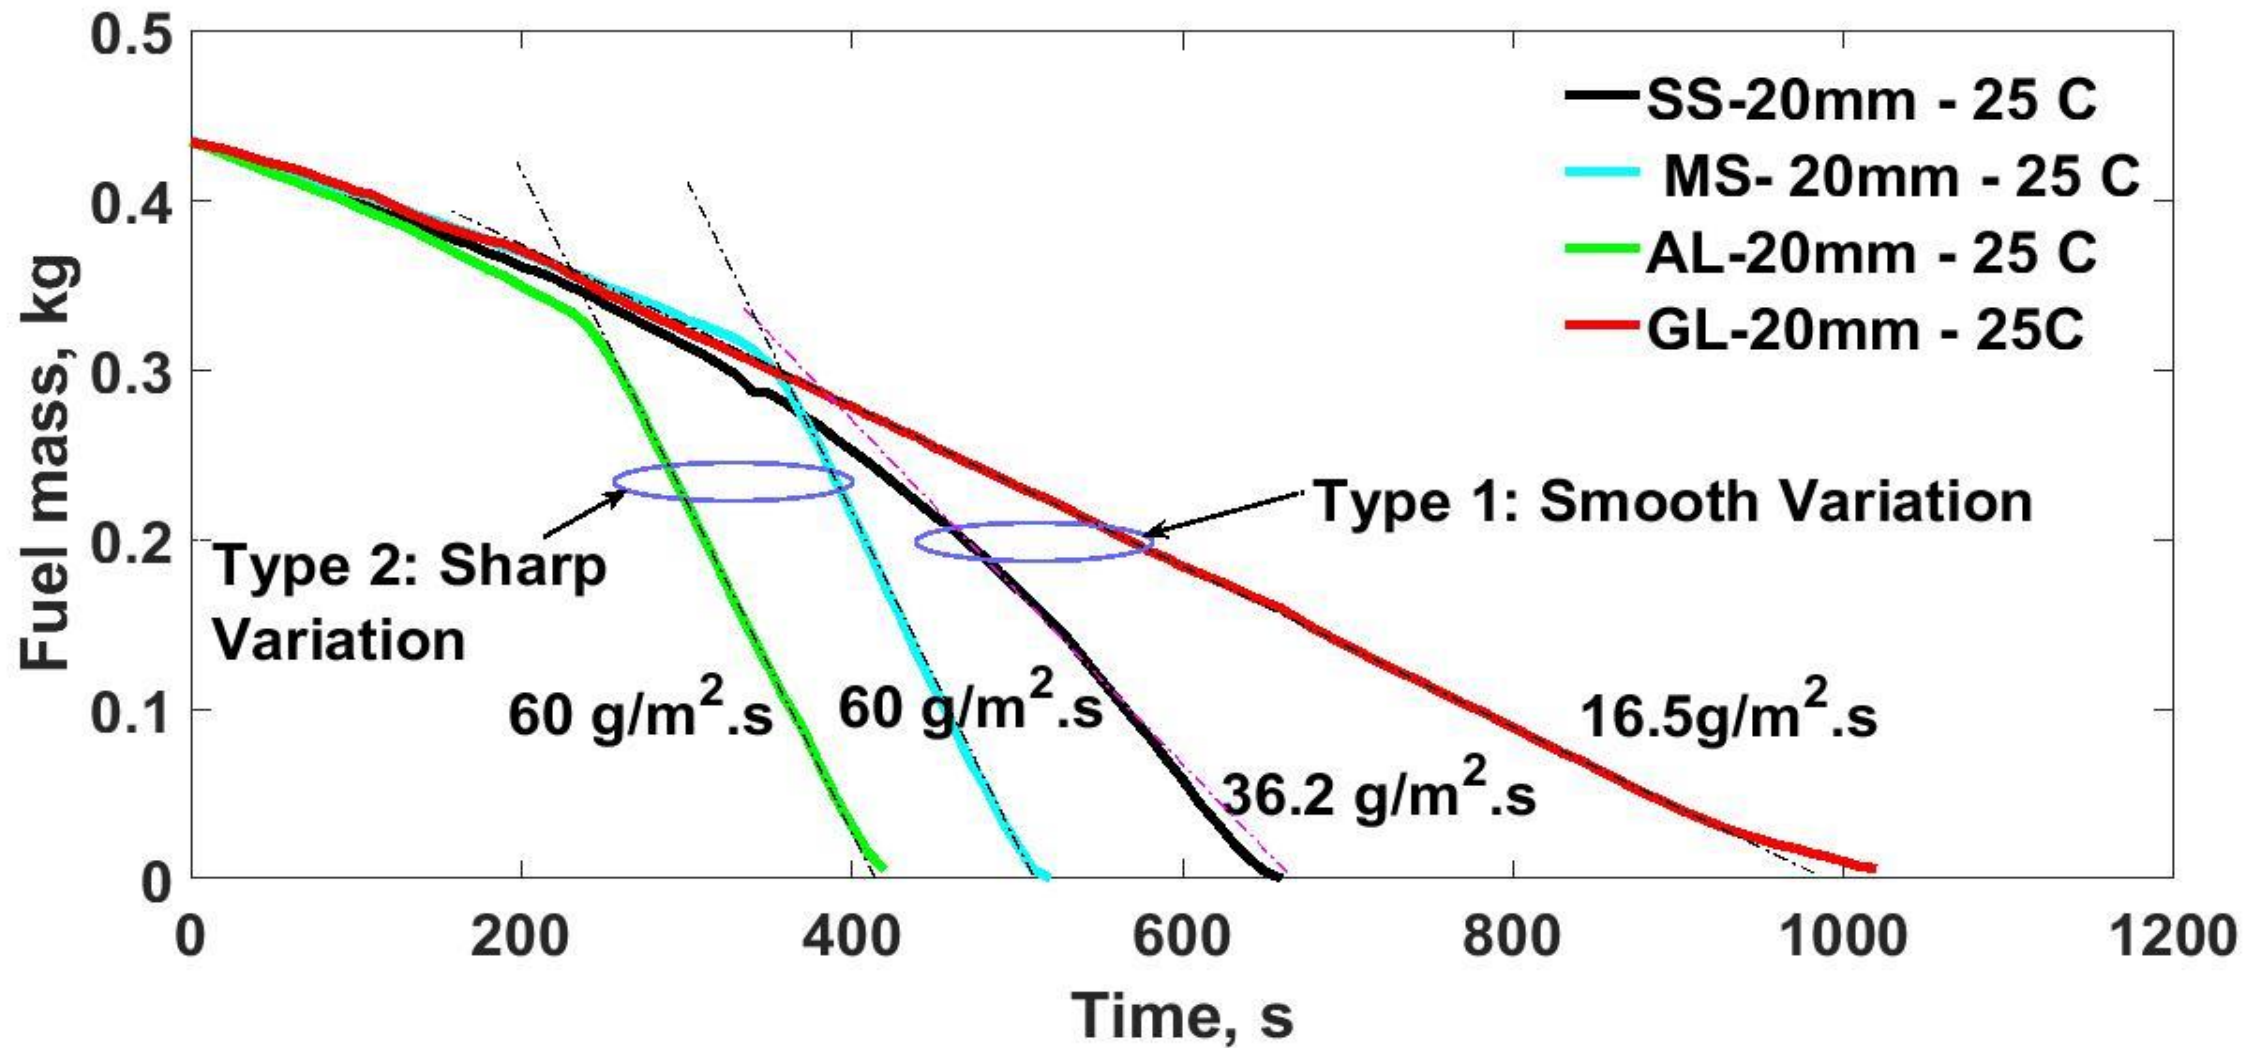


- Aluminium with thermal conductivity of 60 W/m K shows faster burn rate compared to Glass with a thermal conductivity of 1.14 W/m K .
- Thermal conductivity of the wall material (and thermal diffusivity) would be the key parameter that results in increased conduction heat transfer in case of AL & MS which results in quick bulk boiling of fuel compared to SS & GL pans.

SL.NO	Pan Material	Heptane thickness (mm)	Initial Flux g/m ² .s	Time (sec)	Peak Flux g/m ² .s	Time (sec)
1	AL	10	11.6	0 to 70	52	110 to 200
2	AL	13	11.6	0 to 60	50	160 to 300
3	AL	20	11.1	0 to 130	60	240 to 410
4	MS	10	10.0	0 to 70	42.8	190 to 310
5	MS	13	11.3	0 to 60	48.2	270 to 400
6	MS	20	10.1	0 to 120	60	350 to 510
7	SS	10	10.4	0 to 70	24.8	240 to 400
8	SS	13	10.1	0 to 60	28.4	320 to 470
9	SS	20	11.1	0 to 120	36.2	460 to 650
10	GL	10	10.0	0 to 280	13.5	415 to 660
11	GL	13	9.1	0 to 180	14.6	520 to 840
12	GL	20	10.6	0 to 120	16.5	340 to 960


- Initial flux which is largely controlled by the convection is nearly the same (since radiation is less for smaller diameter pans at initial stage), irrespective of fuel thickness and pan material.
- Peak flux varies with the fuel thickness & pan material
- Since it was not yet clear whether the conduction or radiation is responsible for peak flux, experiments were done to examine the role of wall conduction by suppressing it.....

Experiment *without* and *with* jacket for water circulation
C200mm dia, 60mm deep MS pan, heptane pool

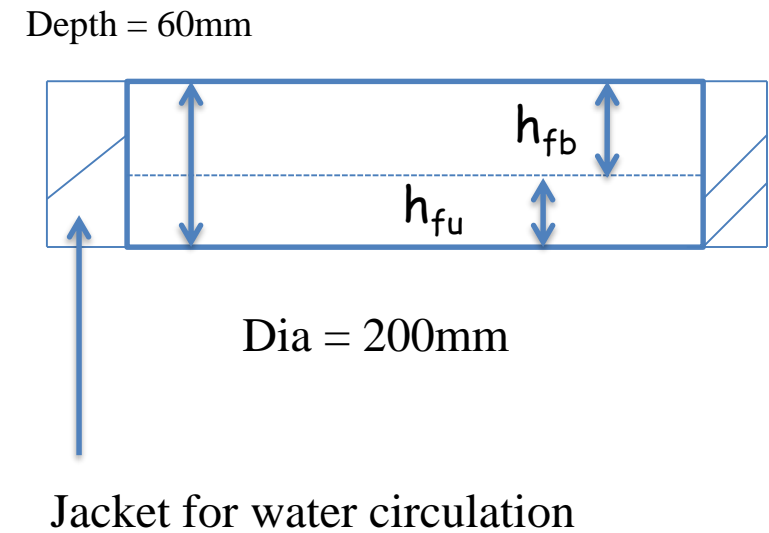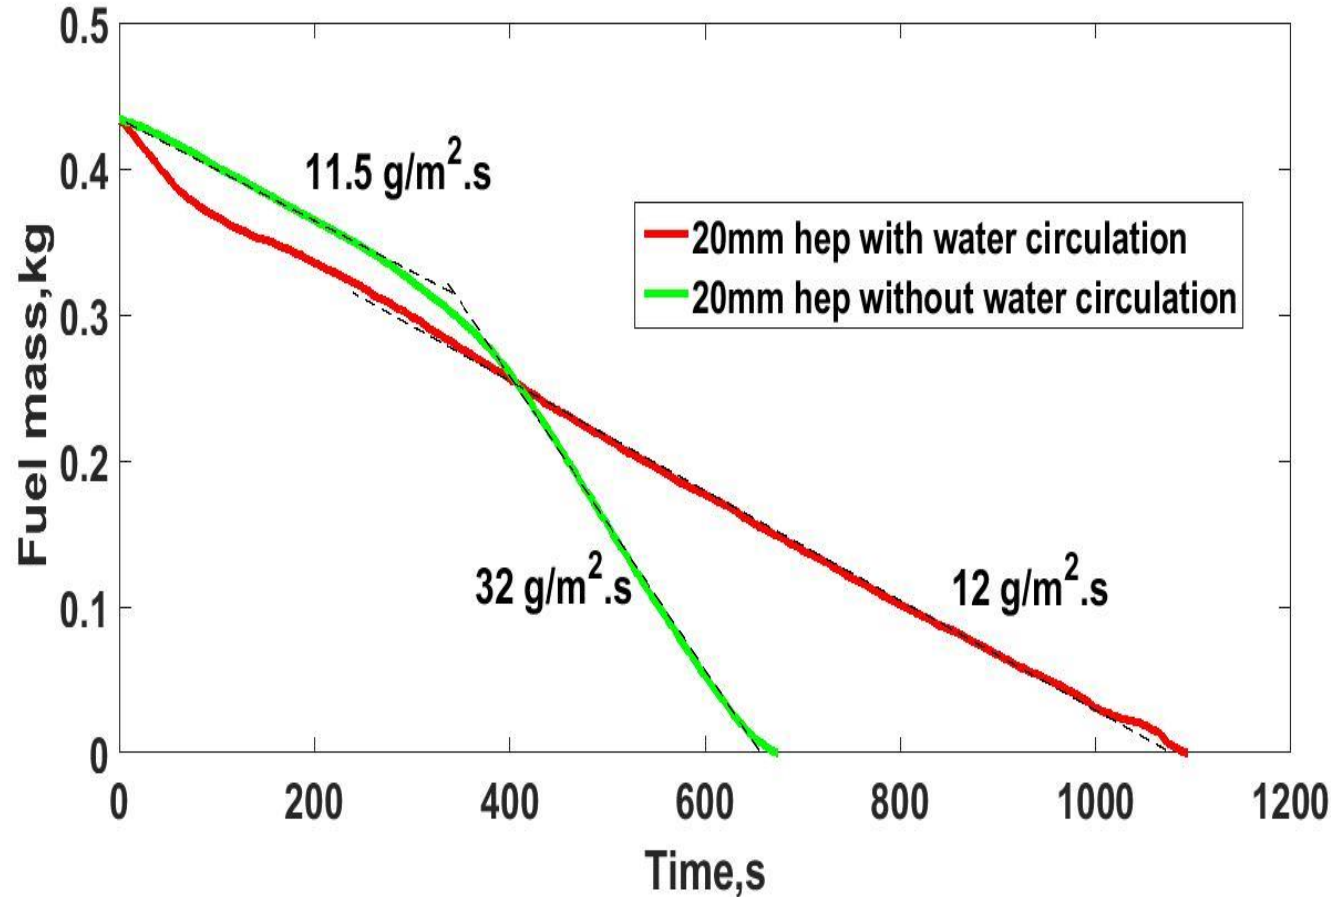


If the conduction effects are suppressed the burn rate remains unchanged even during peak condition and so *conductive flux is the crucial feature for pans of this diameter*

What is happening in the liquid phase
with different pan materials?


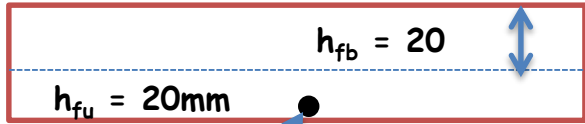


Fuel temperature at 1mm height

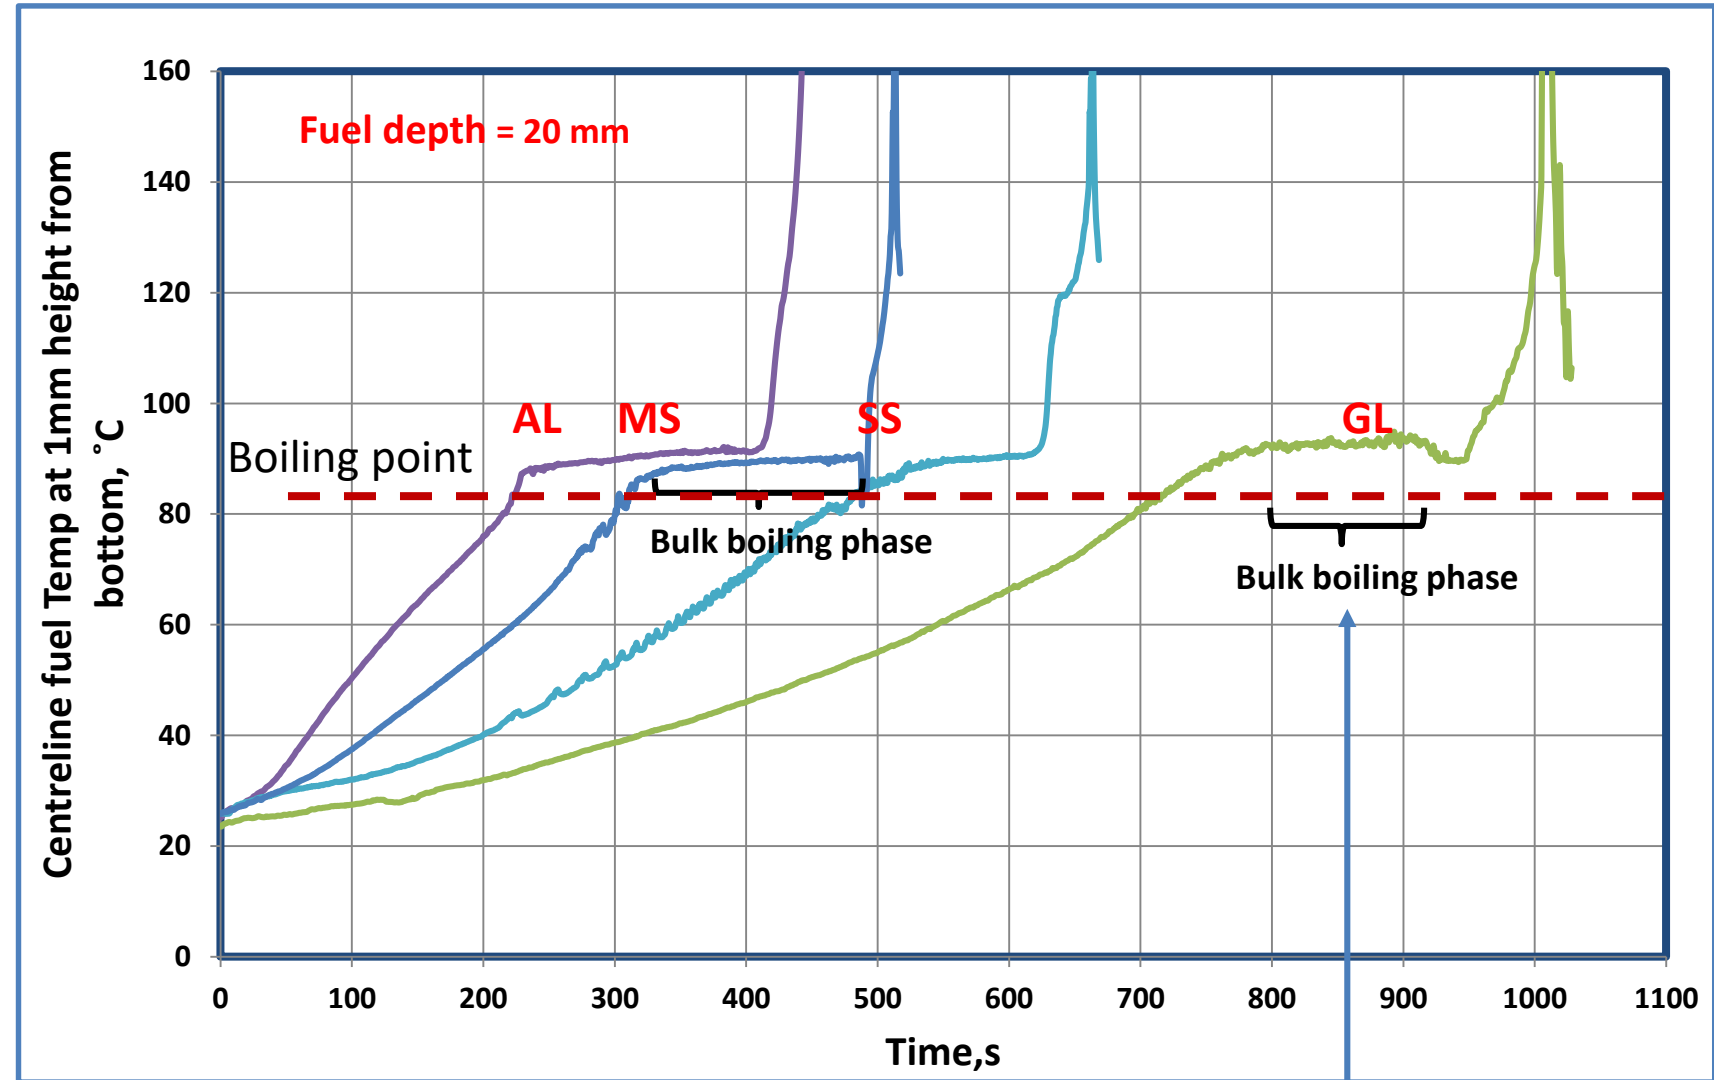

- Fuel reaches boiling in materials of higher conductivity earlier – related directly to increased wall conduction heat transfer into the liquid fuel.
- The burn rate in the subsequent period is due to bulk boiling


Wall temperature behaviour?

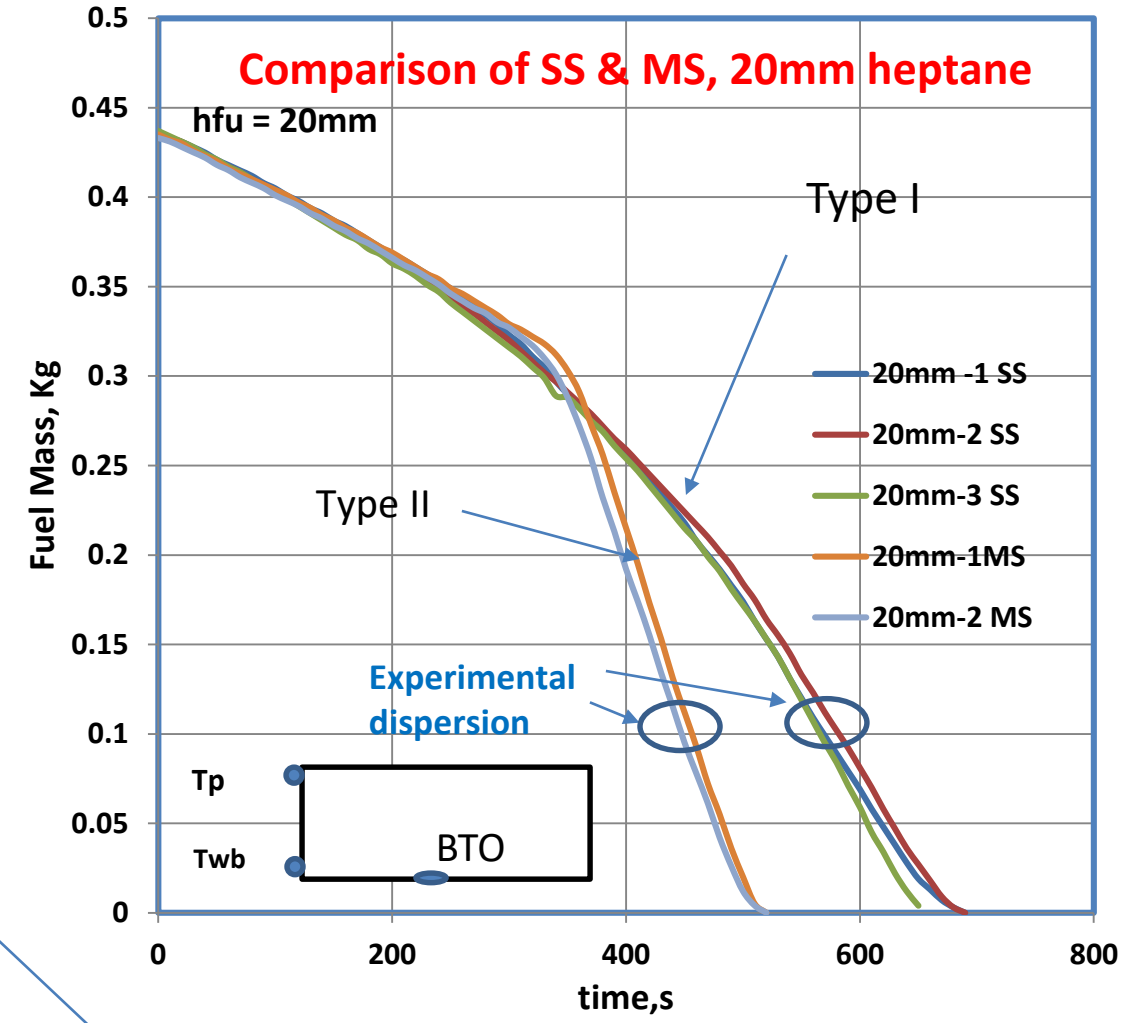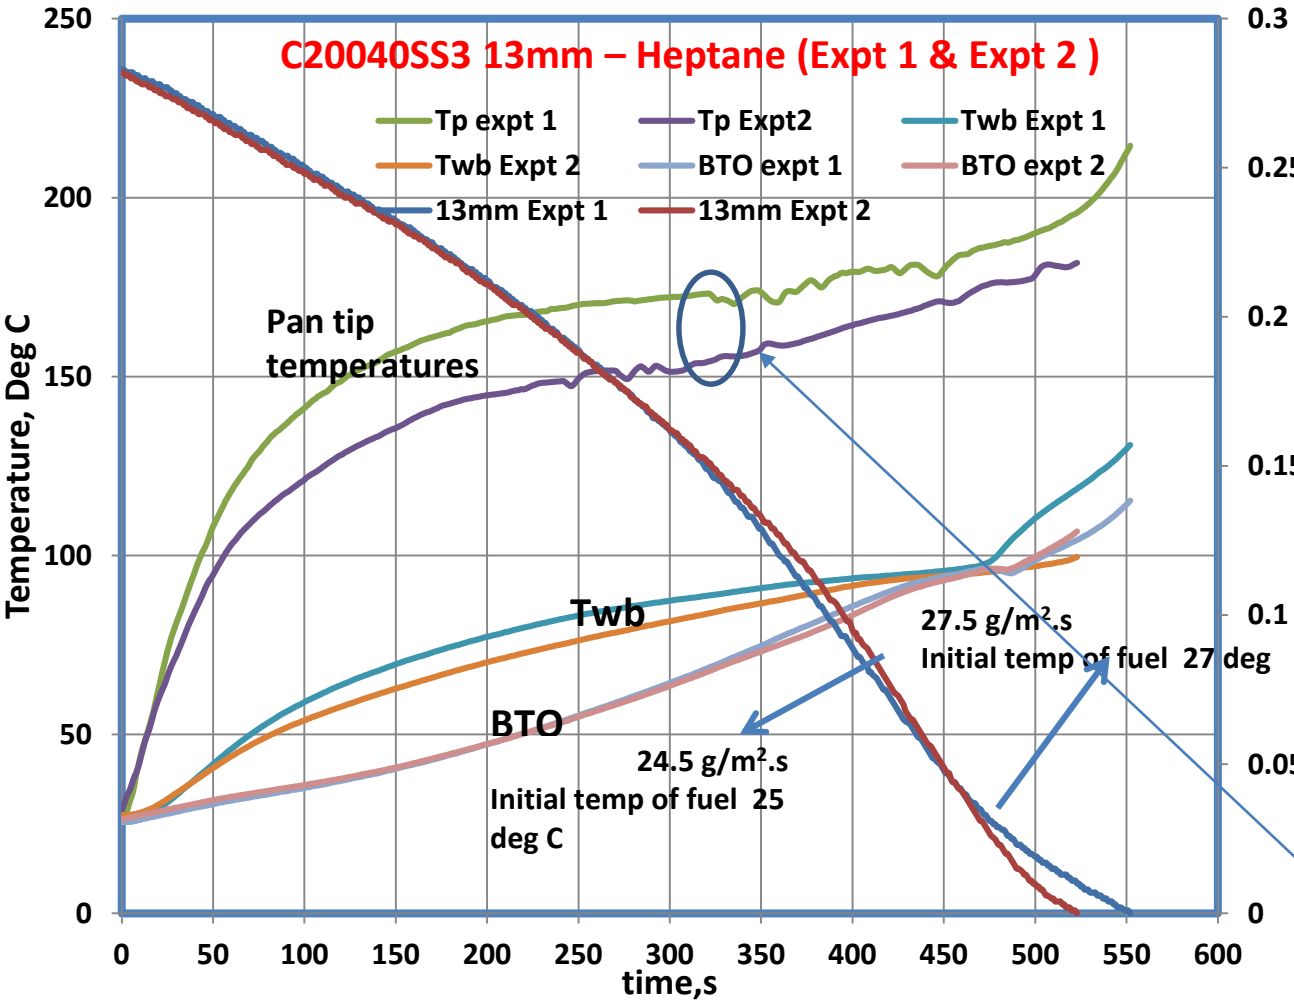

- Even though the pan tip temperature difference is about 15 to 20 °C, the burn time variation of two experiments is not much and their behaviour is about the same (all dispersions are within 5 %)
- The initial flux for both SS & MS pans are about the same and the peak flux of the same pan experiments does not vary much.


Other fuels – Kerosene, Diesel and Alcohol

Fuel depth and material effect on burn rate of kerosene 200 mm dia, 40 mm depth MS and SS pan

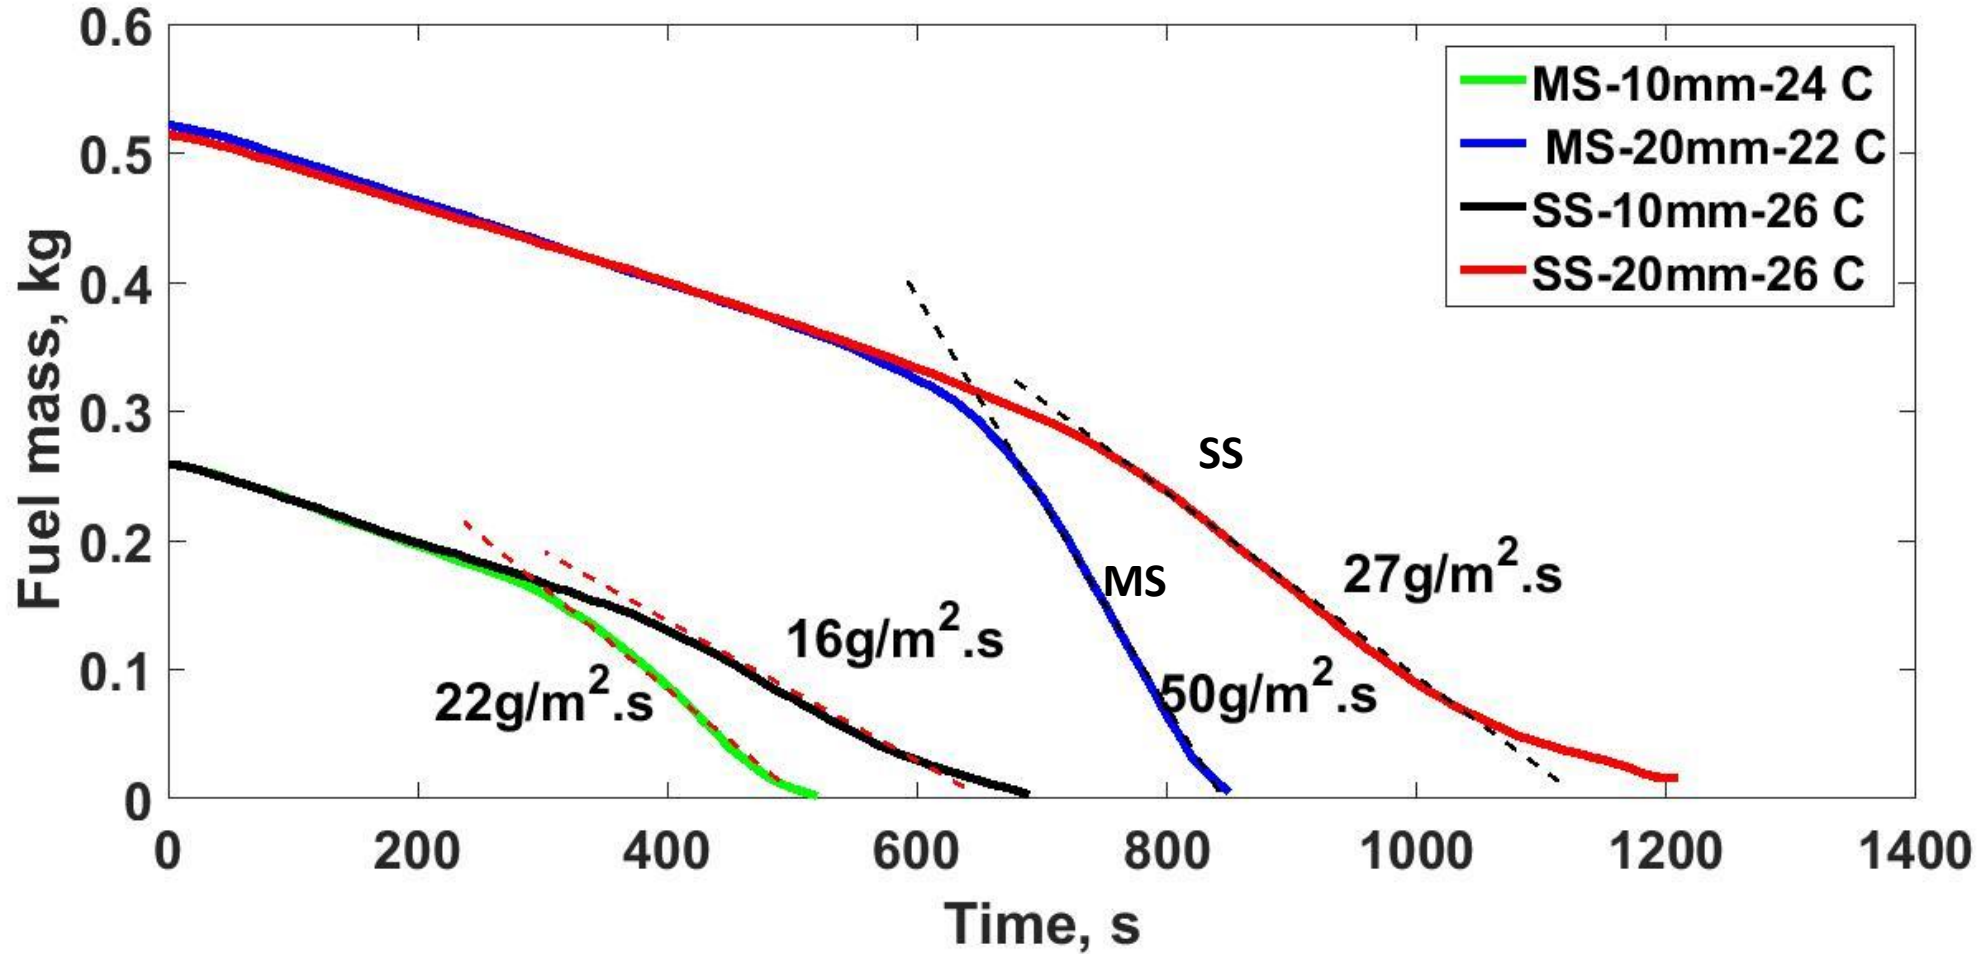



- The burn behavior is similar to n-heptane behavior but with reduced peak flux values
- Mass flux increases with increase in thickness of fuel and MS pan experiment has

Fuel depth and material effect on burn rate of diesel in 200 mm dia, 40 mm depth MS and SS pan

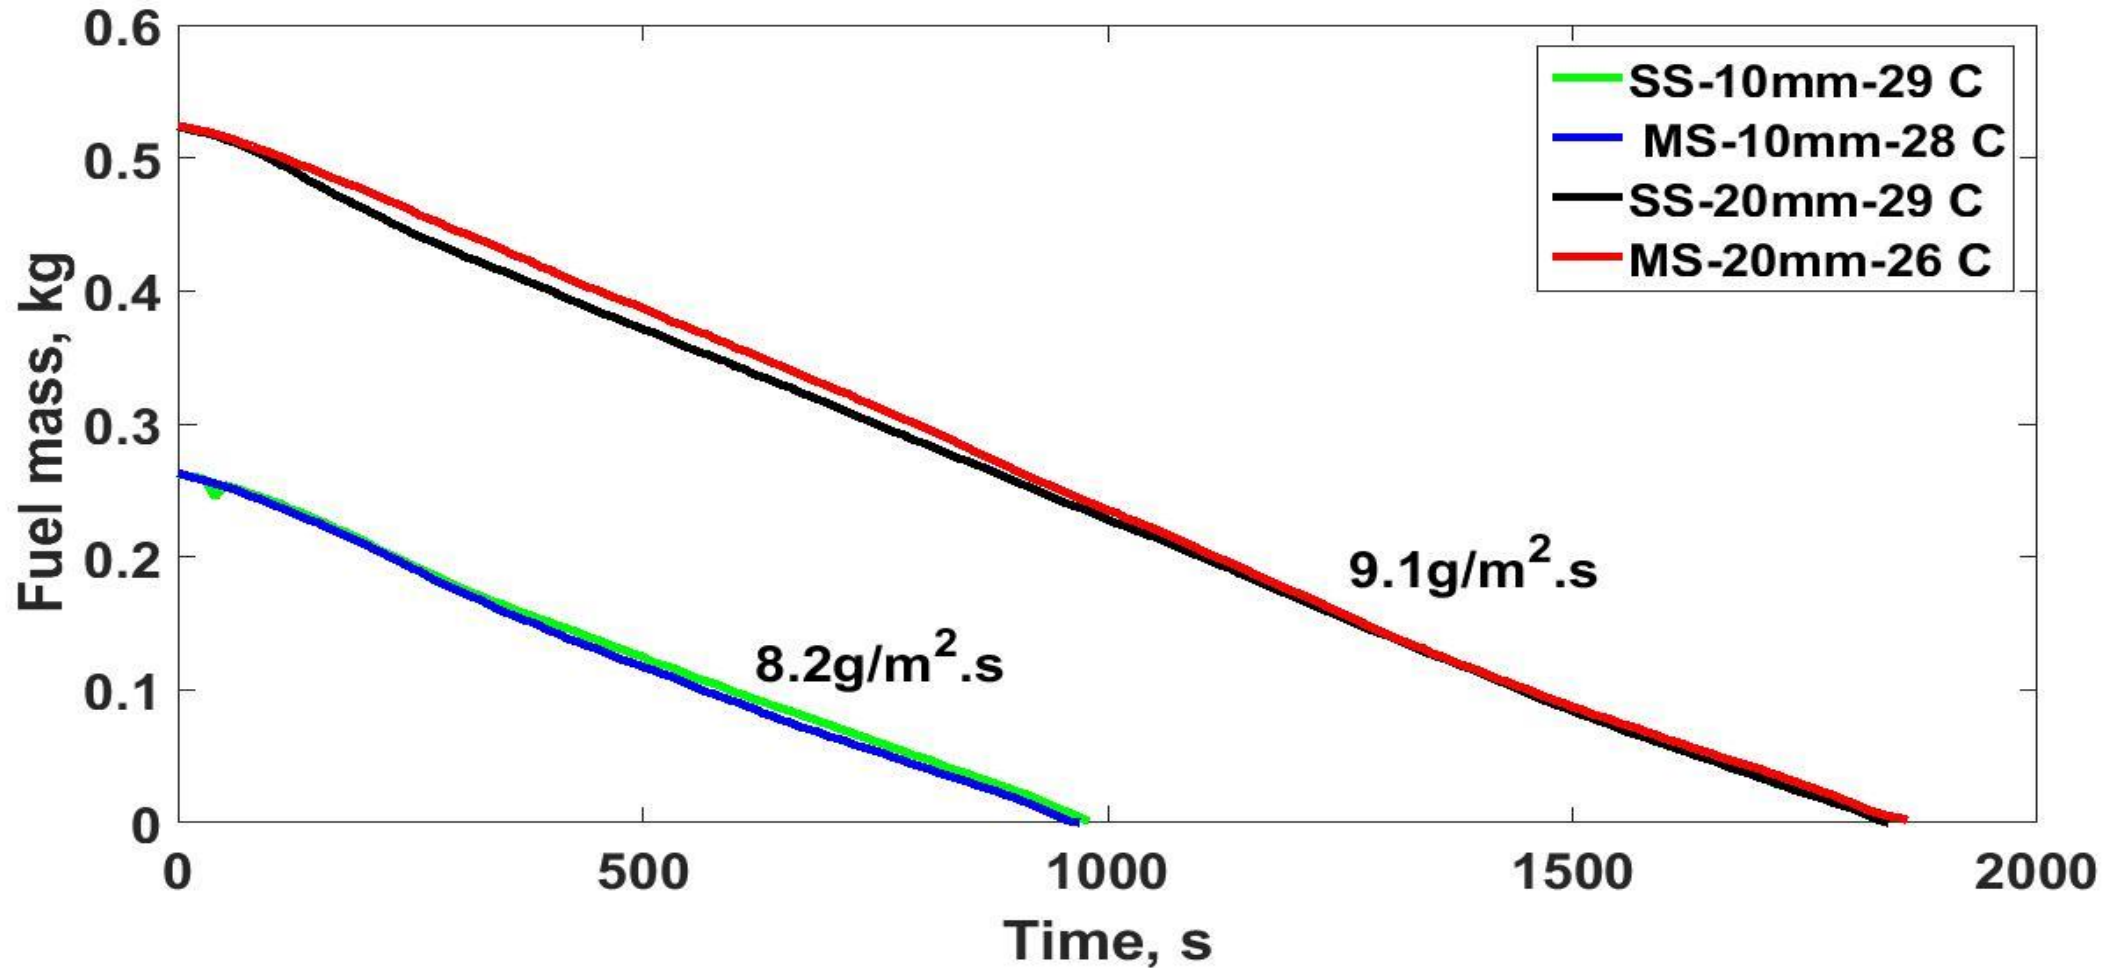



Fuel thickness and material effect on the burn rate is negligible for diesel fuel

Fuel depth effect on burn rate of methanol and ethanol fuel in 200 mm dia, 40 mm depth MS pan

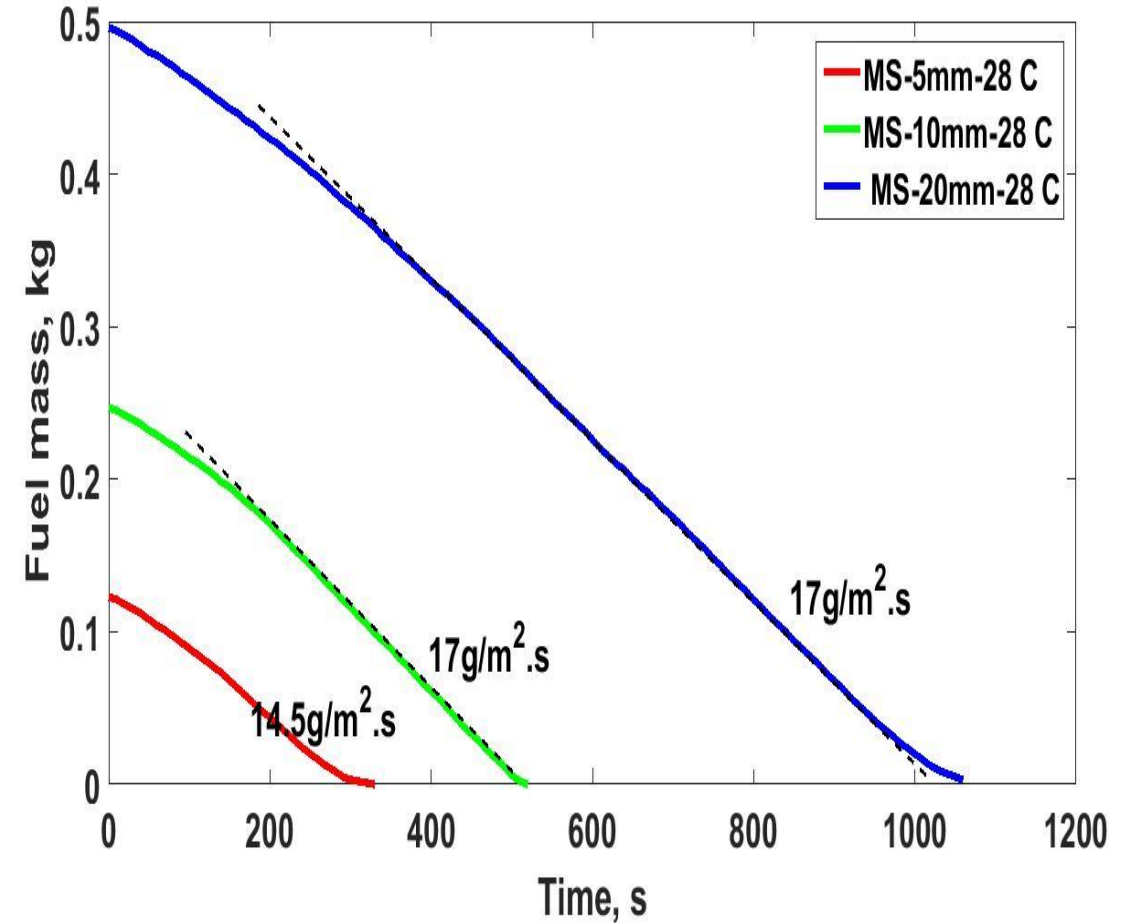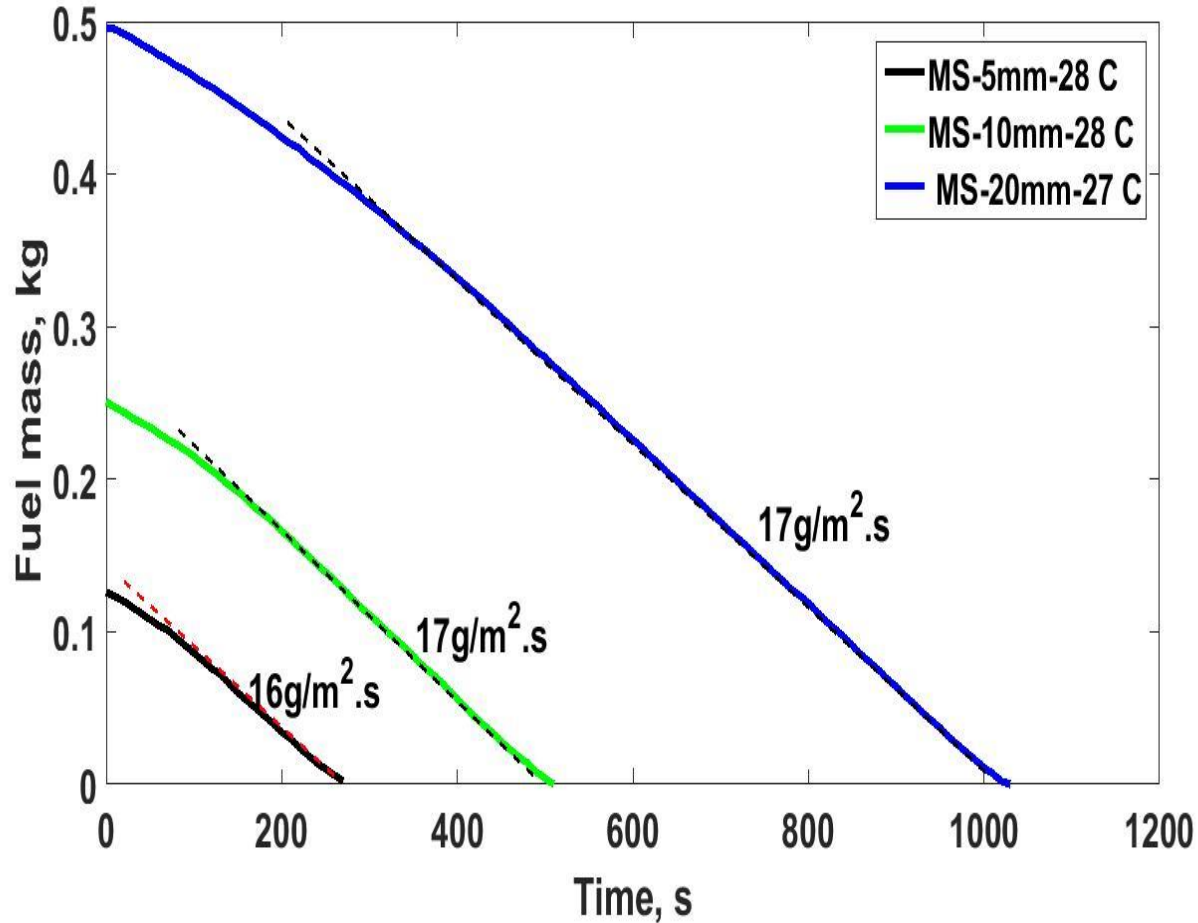


Fuel depth effect on burn rate is negligible for methanol and ethanol

Fuel temperature of different fuels at 1mm height from the bottom of pan

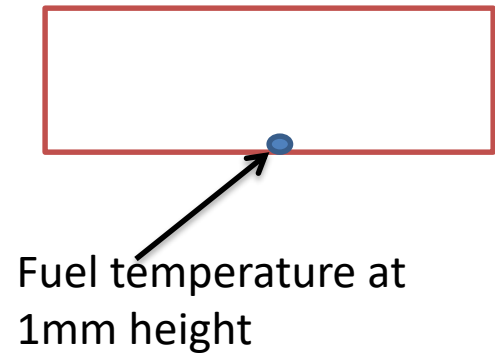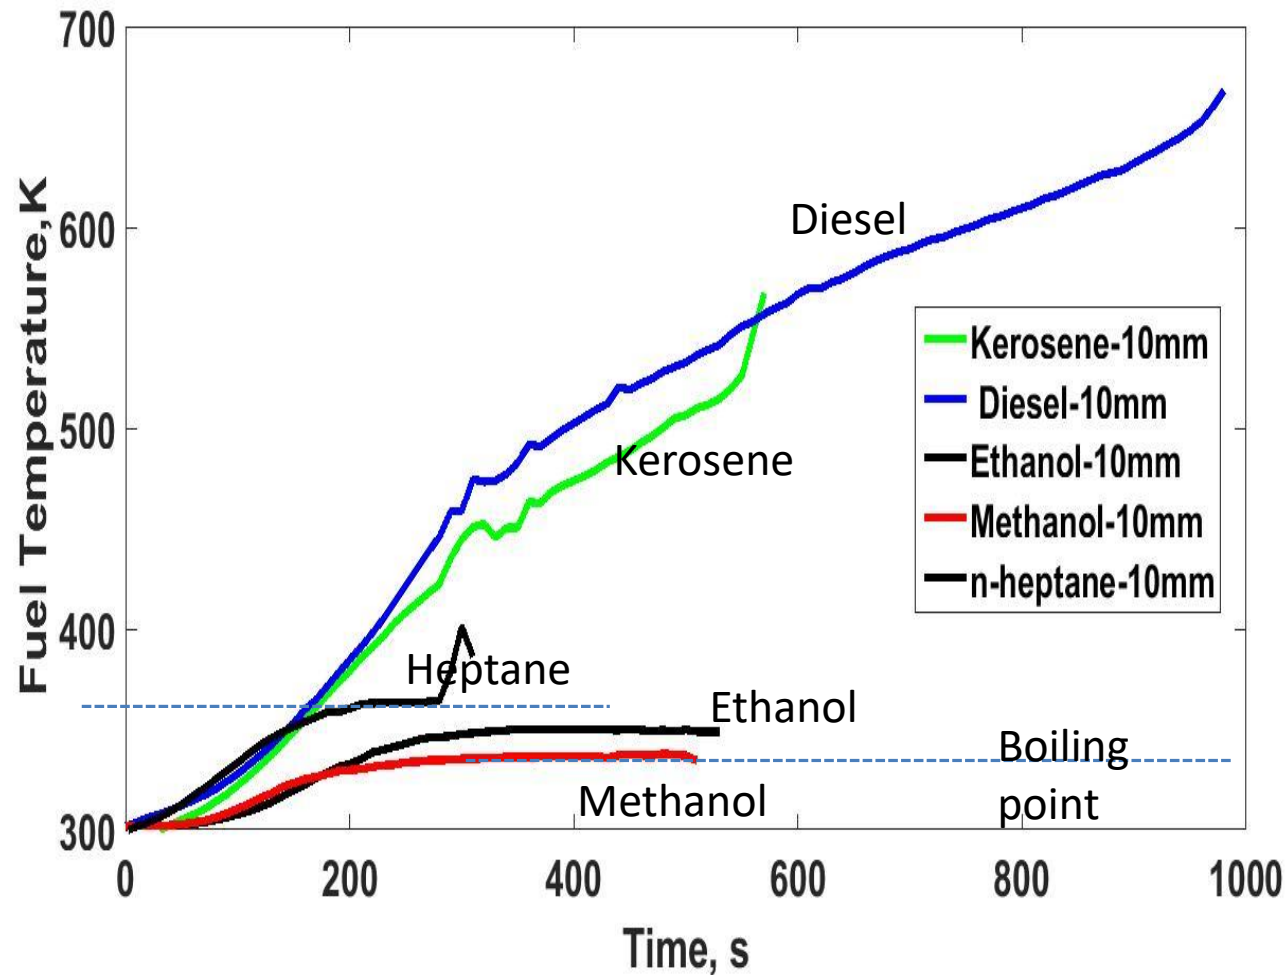

- In case of pure fuels – heptane, methanol and ethanol, the maximum temperature is the boiling point
- In the case of kerosene and diesel, the temperature increases to much larger values

Mass loss rate of different fuels in C200mm dia, 40mm deep MS pan.

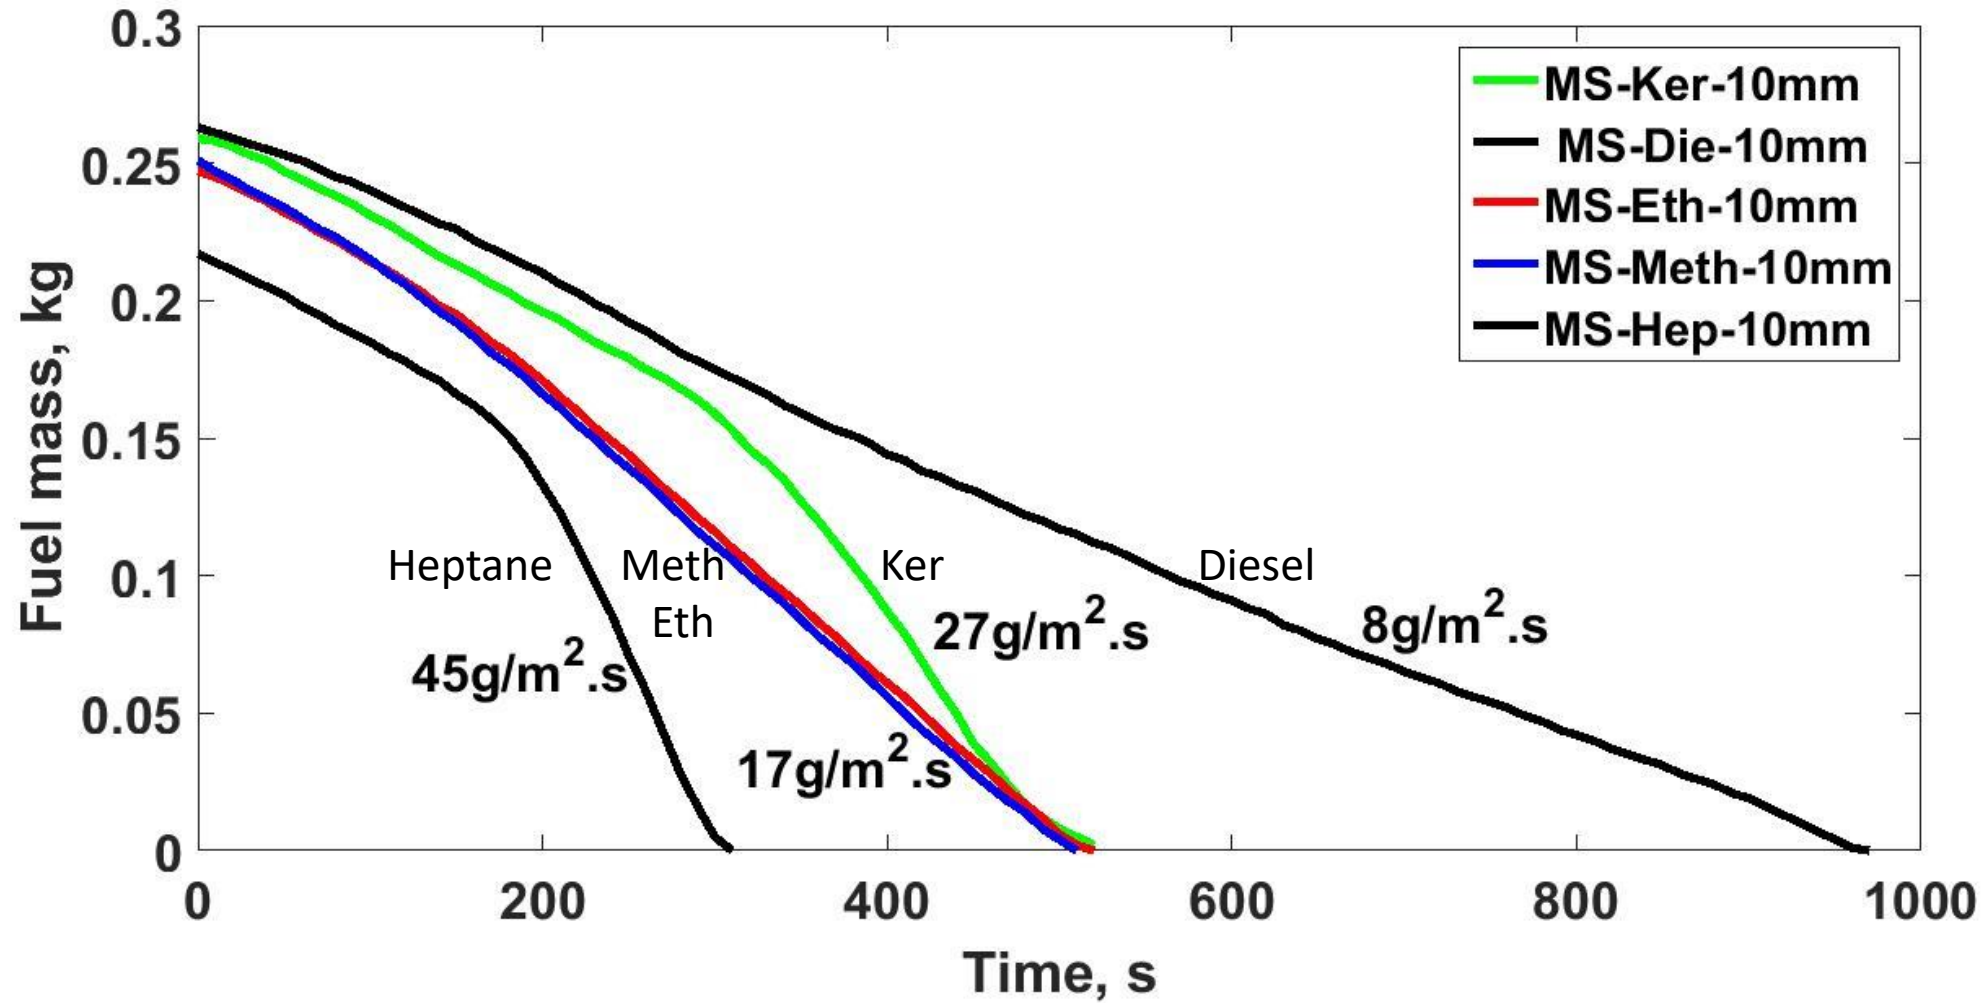

Key points from the experiments

- The experiments conducted here and those in China for n-heptane match well over the range tested with 200 mm dia SS pan with 13 mm fuel thickness.
- The present experiments are with AL, MS, SS and GL with a factor 60 in thermal conductivity change and 24 in thermal diffusivity change and fuel thickness explored are 10 to 20 mm for n-heptane fuel.
- In terms increasing order of burn rate fluxes, - diesel, methanol, ethanol, kerosene and heptane
- *With glass, the dominant heat transfer mode is convection. With others, there is increasing role of conduction and at larger diameters and higher fuel fluxes, some radiation as well.*
- *Sharp changes in burn rate with MS and AL are due to very fast conduction through the walls causing sudden appearance of boiling heat transfer all over.*

Non-Dimensional Number, M_{pc}

The evolution of a dimensionless number for defining pan conduction, M_{pc} to account the burn rate behavior should involve the following aspects.

- **Increase in wall material thermal conductivity (k_w) should increase the heat transfer into the pan and hence increase M_{pc} .**
- **Increase in free board (h_{fb}) and pan depth (h_{pan}) should reduce the heat transfer and hence M_{pc} .**
- **Increase in fuel thickness (h_{fu}) increases the burn rate and hence M_{pc} .**
- **Increase in pan diameter increases the burn rate and must be so reflected in M_{pc} .**
- **Decrease in pan wall thickness should result in reduced conductive flux and should be reflected in reduced M_{pc} .**
- **Increase in initial fuel temperature increases the burn rate and hence M_{pc} .**

Rendering conductive heat transfer coefficient, k_w/h_{pan} dimensionless is performed using the convective heat transfer coefficient, $h_{g;conv}$ that is obtained by expecting that the burn rate flux is controlled by convection in the early stages in a small diameter pan.

With regard to other dimensions - fuel thickness, free board, pan diameter and pan wall thickness, several dimensionless constructions are possible. Amongst these, one candidate for rendering the fuel thickness, h_{fu} dimensionless is conduction thickness, $k_{fu}/h_{g;conv}$ whose value is about 0.03 m.

Non-Dimensional Number, M_{pc}

- The candidate for rendering the pan diameter dimensionless should arise from free convective length scale, $[v_g^2/g]^{1/3}$, where $v_g = \mu_g/\rho_g$ is the dynamic viscosity of the hot gases. With $\mu_g = 1.8 \cdot 10^{-5}$ kg/m.s, $g =$ acceleration due to gravity, this length scale is 0.021m.
- Since these dimensions are independent quantities, they can be incorporated into a constant.
- After much study, the dimensionless number is grouped into product of four parameters as shown below
- $P1 = [k_w t_w h_{fu} / (h_{pan} h_{g,conv})]^{1/3}$ - accounts for conductive and convective heat transfer effects
- $P2 = \{[1 - \exp(-7 h_{fu}^{0.2} (h_{fb}/h_{pan})^{0.05} * d_{pan}^{1.3} (1 + 0.1 * h_{wr} d_{pan}^{1.3}/h_{pan}^{2.3}))]\}$ - accounts for pan diameter in addition to free board h_{fb} and water depth h_{wr}
- $P3 = [T_{bfu}/T_o - 1]^{0.45}$ - accounts for initial fuel temperature
- $P4 = c_{pg} * T_o / [L + c_{pfu} (T_{bfu} - T_o)]$ - accounts for fuel properties

Thus, $M_{pc} = 285 * P1 * P2 * P3 * P4$, The constant 285 is chosen such that the value of M_{pc} corresponds to the flux values for larger diameter pans.

k_w/h_{pan} is conductive heat transfer coefficient, h_{gcv0} is convective heat transfer coefficient, h_{fu} is fuel depth, h_{pan} is pan depth in mm, L_{fu} is latent heat of vaporization of fuel in kJ/kg, c_{pfu} is specific heat of fuel in kJ/kg K, T_{bfu} is fuel boiling temperature in K, T_o is initial temperature of fuel in K

Note: The various values of indices were obtained to reduce the mean square error after extensive comparison with the experimental data

The experimental parameters and M_{pc}

$$h_{pan} = 0.04 \text{ m}, d_{pan} = 0.2 \text{ m}$$

Matl	kw	ρ_w	c_{pw}	α_w	hfu	T_0	L_{fu}	T_{bfu}	c_{pfu}	$\frac{L_{fu}}{c_{pfu}(T_{bfu}-T_0)}$	Mpc
	W/m K	kg/m ³	kJ/kg K	mm ² /s	m	K	kJ/kg	K	kJ/kgK		
AL	60	2710	0.91	24.33	0.02	300	322.0	369	2.10	2.2	49.4
AL	60	2710	0.91	24.33	0.013	300	322.0	369	2.10	2.2	40.1
AL	60	2710	0.91	24.33	0.01	300	322.0	369	2.10	2.2	35.4
MS	32	7850	0.5	8.15	0.02	300	322.0	369	2.10	2.2	40.1
MS	32	7850	0.5	8.15	0.013	300	322.0	369	2.10	2.2	32.8
MS	32	7850	0.5	8.15	0.01	300	322.0	369	2.10	2.2	29
SS	16	7880	0.46	4.41	0.02	300	322.0	369	2.10	2.2	32
SS	16	7880	0.46	4.41	0.013	300	322.0	369	2.10	2.2	26
SS	16	7880	0.46	4.41	0.01	300	322.0	369	2.10	2.2	23
GL	1.14	2320	0.75	0.66	0.02	300	322.0	369	2.10	2.2	13
GL	1.14	2320	0.75	0.66	0.013	300	322.0	369	2.10	2.2	10.8
GL	1.14	2320	0.75	0.66	0.01	300	322.0	369	2.10	2.2	9.4

← Conductive heat transfer very High

← Conductive heat transfer high


← Conductive heat transfer matching with convection

← Convective heat transfer most dominant

L_{fu} = Heat of vaporization of n-Heptane, T_{bfu} = Boiling point of n-Heptane

Correlation to predict the mean burn rate

$$\begin{aligned} \dot{m}_{fu} \text{ (g/m}^2\text{-s)} &= 7.8 + 0.74M_{pc} \text{ for } M_{pc} < 26.5 \\ &= 213 - 7 * M_{pc} \text{ for } 26.5 < M_{pc} < 27.5 \\ &= 0.79 * M_{pc} - 1.2 \text{ for } M_{pc} > 27.5 \end{aligned}$$

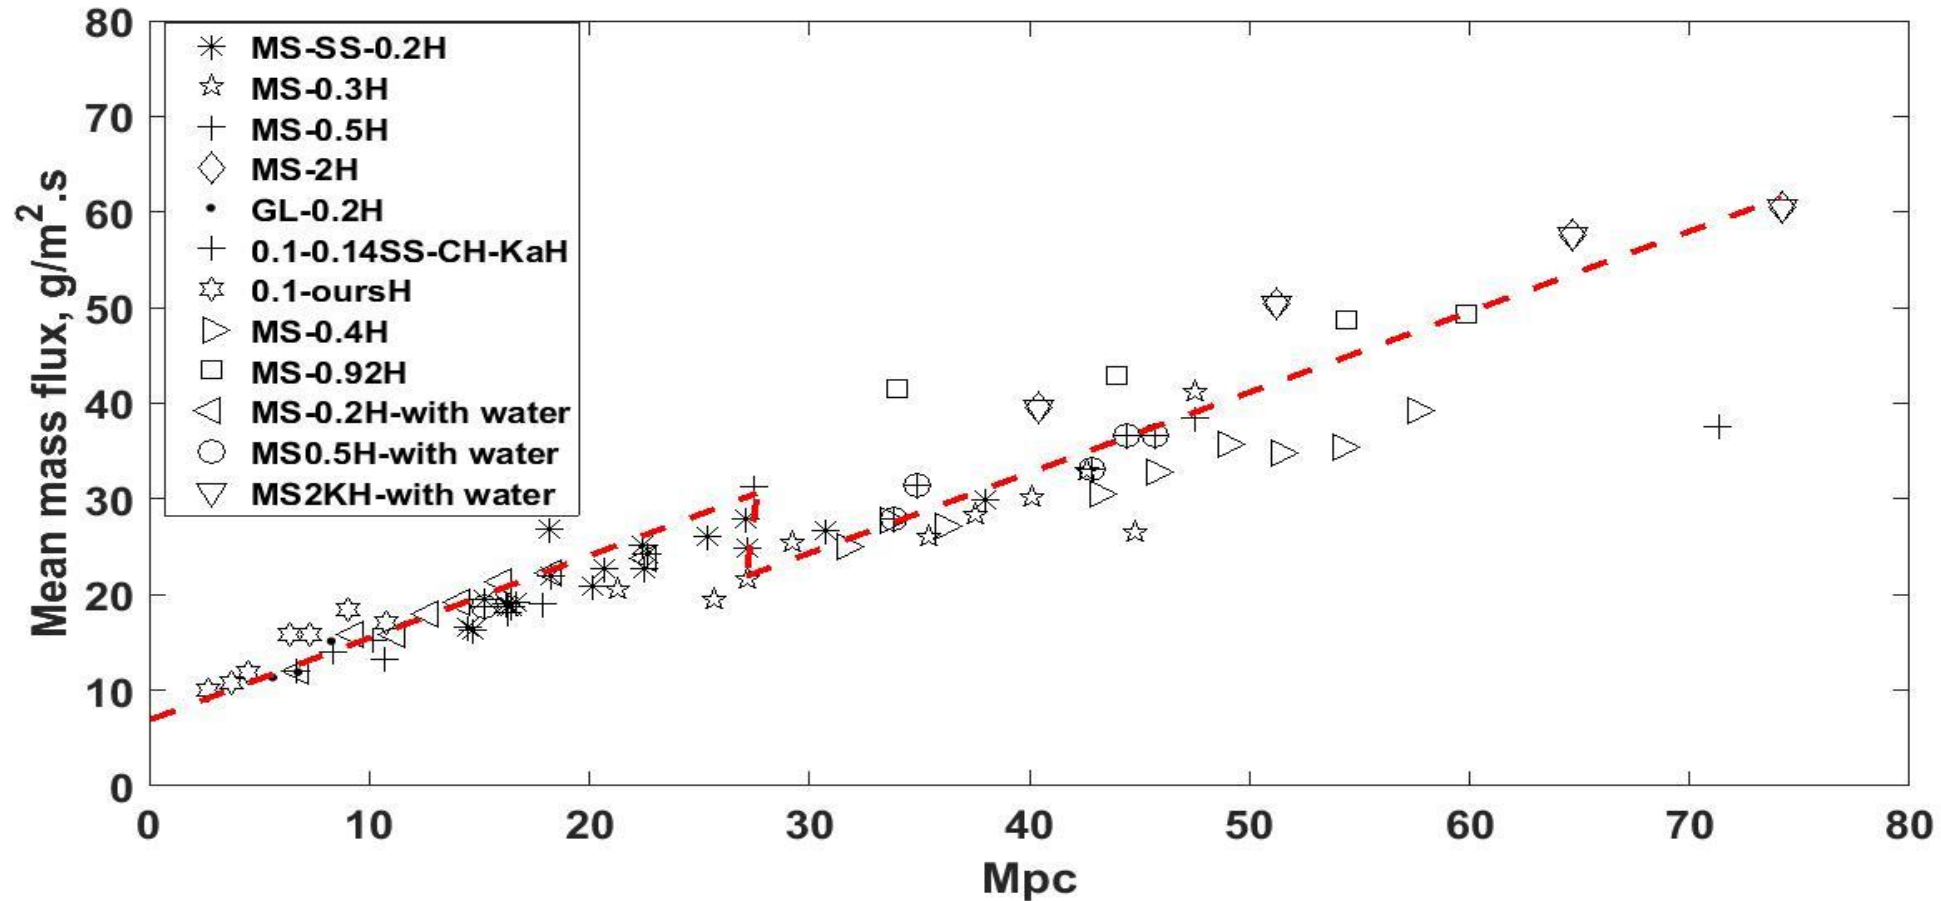

Conclusions - 1

- Burn rate is strongly dependent on the fuel thickness, pan material and initial temperature of fuel in case of n-heptane and kerosene fuel.

- The principal mechanisms governing the burn rate are identified clearly:

All pan materials have initial burn controlled by convective flux.

The initial convective flux for all the pans is described by convective heat transfer coefficient of $4.5 \text{ W/m}^2\text{K}$.

Smaller pans have increased contribution of conductive flux depending on the thermal conductivity of wall material.

Larger pans will in addition get enhanced contribution of radiation.

- High flux which is generally observed in larger diameter pans can be obtained in the smaller pans by increasing the thickness of fuel, this increase is being due to conductive heat transfer.
- An intriguing behaviour of sharp burn rate change caused by high conductivity wall material (like MS, Al) as different from SS is brought out in case of n-heptane and kerosene fuels. The interplay of wall thermal conductivity and heat drawn away through the wall is considered the reason.

Conclusions - 2

- A non-dimensional parameter (M_{pc}) to distinguish the burn behaviour of materials of pans, fuel depth and initial fuel temperature is set out. It is also used to obtain a correlation for the burn rate flux of fuels discussed here.
- These results are consistent with general understanding, but this work provides quantitative estimates for the burn rate flux given the geometric parameters of the pan and thermochemical parameters of the fuel. It is expected that that the predictions would be realistic for other fuels (mixture of the primary fuels, for instance).

.....Thank you.